

User Manual

LINE ROTARY SELECTOR



Model: **LDA SE-6 S01**

- 1. Introduction**
- 2. Technical Specifications**
- 3. Connections**

WARNING:

This equipment must not be exposed to drips or water projections. We must not situate objects full of liquids, as glasses, next or on top of the equipment.

1. Introduction:

El conmutador de líneas LDA SE- permits the selection of up to 6 voice lines.


It has an emergency line, which will be connected by line 1.

Incorporates input source of 24V and an output line (L/S).

2. Technical Specifications:

Model	LDASES01
Nº of selection lines	6
Priority entrance	1
Weight	0,12 Kg

3. Connections:

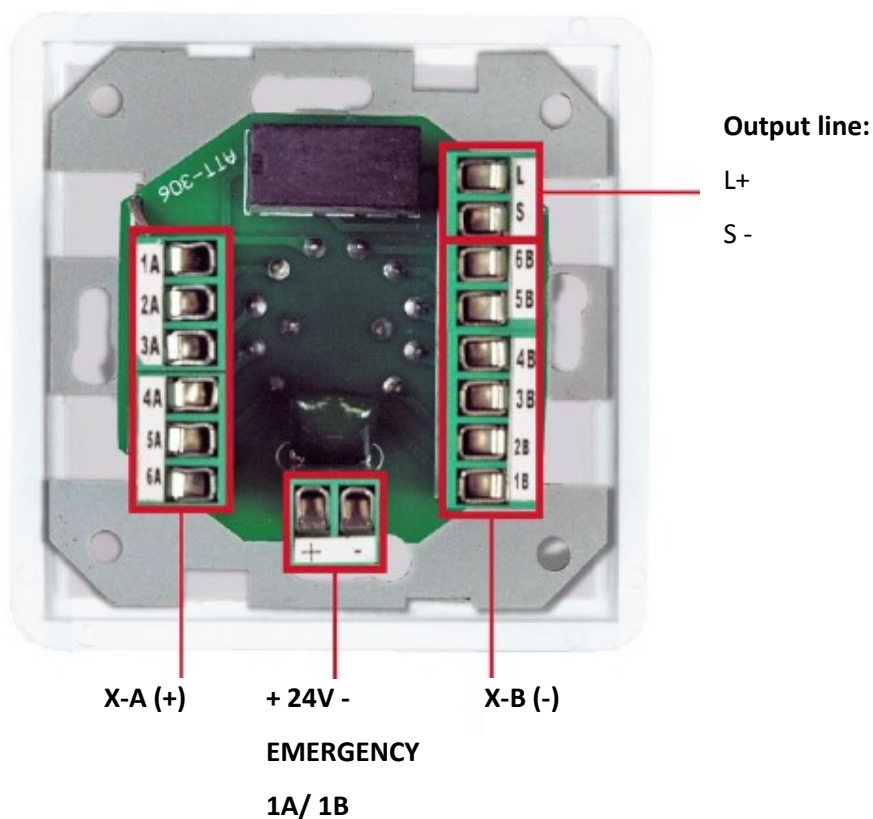

Connections:

X-A (+)	IN + :Positive terminals for input line
X-B (-)	IN - :Negative terminals for input line
OUTPUT + (L)	OUT +:Positive terminals for output line
OUTPUT – (S)	OUT -: Negative terminals for output line
24 V -	Reference input 0 V
24 V +	24 VDC. 9 mA. Output
EMERGENCY	Line 1 (1A / 1B)

See. 0.2