

CI-825TN

Ref: LDACI825TNS01

The LDA CI-825TN is an EN 54-24 certified 40W column loudspeaker. It provides a broad frequency response range, low distortion and high sound pressure level for accurate and intelligible broadcast of evacuation messages and high quality sound reproduction.

It is suitable for both indoor and outdoor thanks to its IP 66 protection, which makes it perfect for all types of environments.

Features of the CI-825TN speaker:

- EN 54-24 certified
- Intelligible voice and excellent sound reproduction
- Robust aluminum housing
- Includes universal swivel bracket for easy angle adjustment
- Able to be switched between 100V and 70V
- Adaptable to extreme environments
- IP66 protection

EN 54-24




Technical Specifications:

Model	CI-825TN
Reference	LDACI825TNS01
Max power	60 W
Rated power	40 W
Transformer	40 / 20 / 10 / 5W @ 100V, 20 / 10 / 5 / 2,5W @ 70V
SPL at 20W/1W (100Hz-10kHz, 1m)	108 dB (20W/1m) / 94 dB (1W/1m)
Frequency response	300 Hz ~15 kHz (-10 dB)
Connection	Fire-resistant cable
Dimensions (W x H x D)	165 x 568 x 150 mm
Weight	5.75 kg
Color	White (RAL9003)
IP protection grade	IP66 (B type according to EN54-24)
Speaker size	4 x 4"
Material	Aluminum

CI-825TN

Ref: LDACI825TNS01

Frequency response and polar diagram:

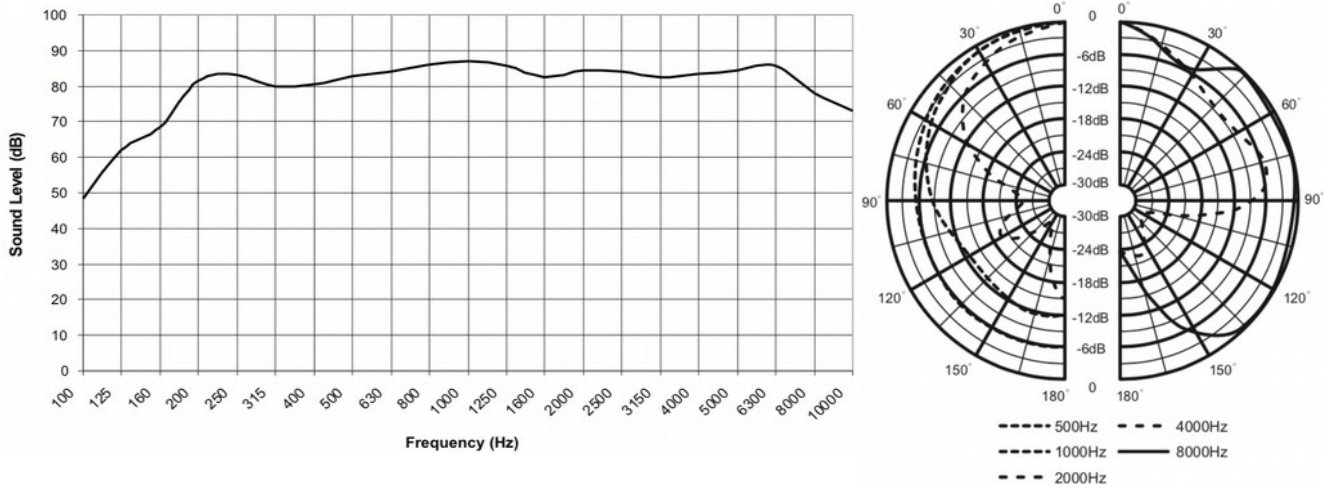

Mechanical details:

